

# Energy Wall U-ERV 2400 Series



U-ERV 2400 Standard Features		Industry Standard Comparison
Airflow Range:	0 to 3200 CFM [2400 Rated]	Full Variable ECM+ Remote Fan Modulation
Dimensions:	54" L X 32" D X 48" Height	2-4X Smaller Size (12" Height per module)
Ultra Lightweight:	392 lbs	2.5X Lighter (Varies by Options) (98 lbs. per module)
AHRI 1060 Tested Core:	EWT-11-42 QTY(4) HWT-11-42 QTY(4)	Patented Static Plate, heat and humidity transfer Static Plate, heat transfer or condensing wrap-around application
Sensible Efficiency:	73% @ 2400 SCFM	Up to 90% Possible
Latent Efficiency:	63% @ 2400 SCFM	Up to 70% Possible
Total Efficiency:	69% @ 2400 SCFM	Up to 80% Possible
Coil Option:	72,380 BTUs/Hr	Dx or Chilled Water. VRF Integrated.
Exhaust Air Transfer:	Zero	Good for Bathroom Exhaust, Laboratories, Hospitals
Cost:	Lowest Installed	Lower transport, installation, maintenance, and fan energy costs
Minimal Maintenance:	Filters @ 3-6 months	Total qty. 2, MERV 11: 5.00" x 40.38" x 1.88" (Actual Size) (Per Module)
Stack Multiple Modules:	Vertical or Horizontal	Patented design - a single duct will connect to multiple U-ERVs
Fan Motors:	ECM+ IP68 Rated	>1.0 CFM/Watt @ 2400 SCFM Variable Airflow adjustability & balancing with mechanical turn potentiometers Remote Variable Airflow adjustability via 0-10V signal
Antimicrobial Membrane:	Salt / Ceramic	Proven highly antimicrobial without the addition of additives
Like a UV Light:	MERV 11 Equivalence	Actively kills bacteria flowing with both airstreams
Non-Fused Disconnect:	UL98 Rated	Lowers Installed Cost - Defeatable Lockout For Safe Access
Safety:		
Duct Connections:		Self tapping screws with duct sealant. Connect to Fan Cube or Unit port
Application:	Any Orientation	Universal Compatibility for Bolt-on, Roof-top, Exterior, or Interior Installation
Electrical Power:	Universal Input AC or DC	90 to 264 VAC Input (50/60Hz) or 40 to 370 VDC Input
Extreme Exterior Shell:	Gray Polypropylene	Corrosion Proof, double wall construction with fumed silica insulation

## U-ERV 2400 Series Model Numbers

Model Number	Type	External Static Pressure @ 2400 SCFM			90 to 264 VAC Input (50/60 Hz)			40 to 350 VDC Input		
		Supply (in. w.g.)	Exhaust (in. w.g.)	Weight (lbs.)	120 VAC 1Ø(Amps)	230 VAC 1Ø(Amps)	208 VAC 3Ø(Amps)	55.2 VDC (Amps)	255 VDC (Amps)	350 VDC (Amps)
UERV 2400LL	Enthalpy	0.5	0.5	392	27.3	19.0	15.8	40	13.6	10
UERV 2400HH	Enthalpy	2.5	2.5	424	54.6	38.0	31.5	80	27.2	20
UERV 2400LH	Enthalpy	0.5	2.5	408	41.0	28.5	23.7	60	20.4	15
UERV 2400HL	Enthalpy	2.5	0.5	408	41.0	28.5	23.7	60	20.4	15
UHRV 2400LL	Sensible	0.5	0.5	392	27.3	19.0	15.8	40	13.6	10
UHRV 2400HH	Sensible	2.5	2.5	424	54.6	38.0	31.5	80	27.2	20
UHRV 2400LH	Sensible	0.5	2.5	408	41.0	28.5	23.7	60	20.4	15
UHRV 2400HL	Sensible	2.5	0.5	408	41.0	28.5	23.7	60	20.4	15

Note: Minimum 180VAC and 255VDC Recommended to Achieve Rated Static Pressure

# Energy Wall U-ERV 2400 Series

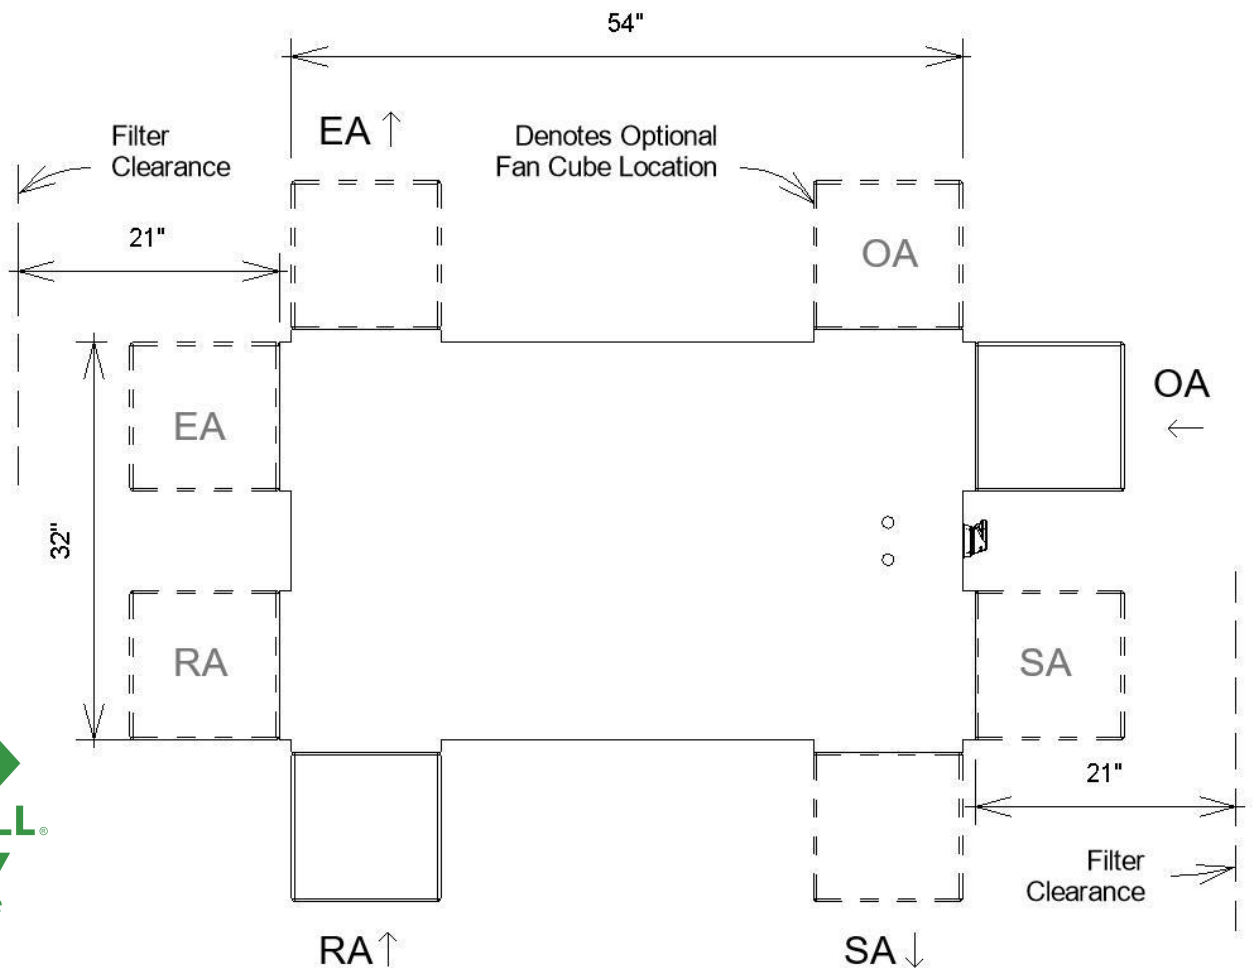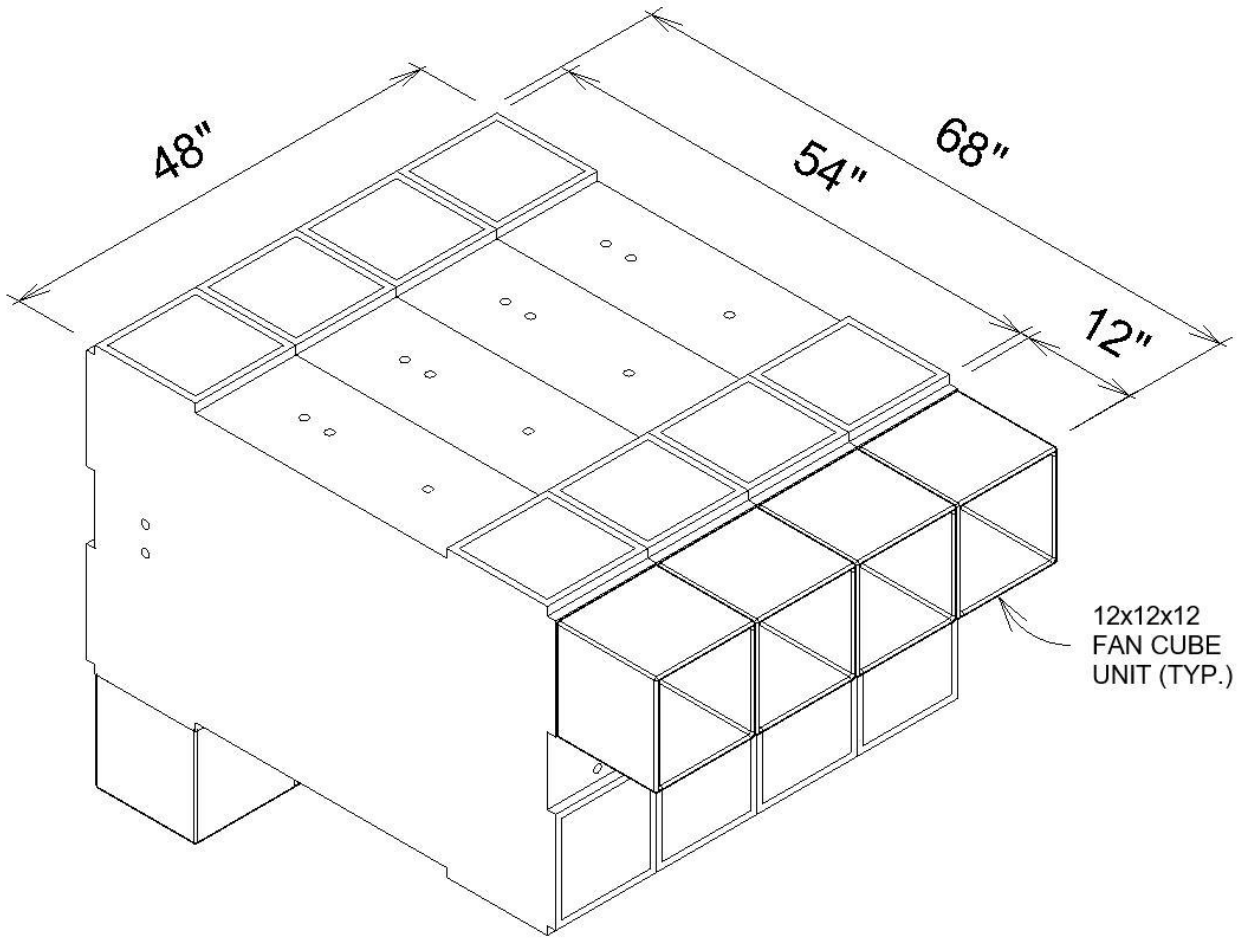

1002 New Holland Ave  
Lancaster PA 17601  
www.energywall.com